


6-Lobe Pin



6-Lobe Pin - Countersunk Self Tapping Screws - A2 Stainless Steel

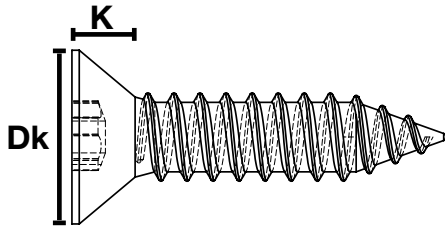

Dimensions (mm)

Box QTY 100

DIAMETER	LENGTH	Dk	K	3/8"	1/2"	5/8"	3/4"	1"	1 1/4"	1 1/2"	1 3/4"	2"	2 1/2"	3"	4"	4 1/2"	DRIVER SIZE
				9.5 mm	13 mm	16 mm	19 mm	25 mm	32 mm	38 mm	44 mm	50 mm	63 mm	75 mm	100 mm	113 mm	
No. 4	2.9mm	4.9	1.5		RTCS 04D	RTCS 04E	RTCS 04F	RTCS 04G									T10
No. 6	3.5mm	6.6	2.1		RTCS 06D	RTCS 06E	RTCS 06F	RTCS 06G	RTCS 06H	RTCS 06I		RTCS 06J					T15
No. 8	4.2mm	7.9	2.5	RTCS 08C	RTCS 08D	RTCS 08E	RTCS 08F	RTCS 08G	RTCS 08H	RTCS 08I	RTCS 08IA	RTCS 08J	RTCS 08K				T20
No. 10	4.8mm	9.3	3.0		RTCS 10D	RTCS 10E	RTCS 10F	RTCS 10G	RTCS 10H	RTCS 10I		RTCS 10J	RTCS 10K	RTCS 10L	RTCS 10N		T25
No. 12	5.5mm	10.6	3.4				RTCS 12F	RTCS 12G	RTCS 12H	RTCS 12I		RTCS 12J	RTCS 12K	RTCS 12L	RTCS 12N	RTCS 12ND	T27
No. 14	6.3mm	12.4	3.8				RTCS 14F	RTCS 14G	RTCS 14H	RTCS 14I		RTCS 14J					T30

Material and Finish


Material: A2 Stainless Steel
Heat Treatment: None
Finish: Passivated

A2
Stainless
Steel

Additional Information

Installation: 6-Lobe Pin - see video

Removal: 2-Way Removable Screw

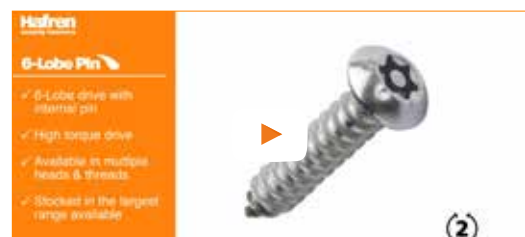

Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.