


Pin Hex - Countersunk Machine Screw - A2 Stainless Steel

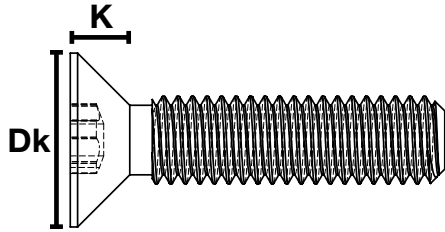

Dimensions (mm) | Part Numbers

BOX QTY 100

LENGTH DIAMETER Thread Pitch	LENGTH																DRIVER SIZE
	Dk	K	6 mm	8 mm	10 mm	12 mm	16 mm	20 mm	25 mm	30 mm	35 mm	40 mm	45 mm	50 mm	60 mm		
M3 x 0.5	5.7	1.7	PHCM 0306-M		PHCM 0310-M	PHCM 0312-M	PHCM 0316-M	PHCM 0320-M								HM2	
M4 x 0.7	7.7	2.3		PHCM 0408-M	PHCM 0410-M	PHCM 0412-M	PHCM 0416-M	PHCM 0420-M	PHCM 0425-M	PHCM 0430-M		PHCM 0440-M				HM2.5	
M5 x 0.8	9.8	2.8		PHCM 0508-M	PHCM 0510-M	PHCM 0512-M	PHCM 0516-M	PHCM 0520-M	PHCM 0525-M	PHCM 0530-M		PHCM 0540-M		PHCM 0550-M	PHCM 0560-M	HM3	
M6 x 1.0	11.8	3.3		PHCM 0608-M	PHCM 0610-M	PHCM 0612-M	PHCM 0616-M	PHCM 0620-M	PHCM 0625-M	PHCM 0630-M		PHCM 0640-M		PHCM 0650-M	PHCM 0660-M	HM4	
M8 x 1.25	15.8	5.0				PHCM 0812-M	PHCM 0816-M	PHCM 0820-M	PHCM 0825-M	PHCM 0830-M	PHCM 0835-M	PHCM 0840-M	PHCM 0845-M	PHCM 0850-M	PHCM 0860-M	HM5	
M10 x 1.5	19.7	6.7						PHCM 1020-M	PHCM 1025-M	PHCM 1030-M		PHCM 1040-M		PHCM 1050-M	PHCM 1060-M	HM6	
M12 x 1.75	23.2	7.4						PHCM 1220-M	PHCM 1225-M	PHCM 1230-M		PHCM 1240-M		PHCM 1250-M	PHCM 1260-M	HM8	

Material and Finish


Material: A2 Stainless Steel
Heat Treatment: None
Finish: Passivated

A2
Stainless
Steel

Additional Information

Installation: Pin Hex - see video

Removal: 2-Way Removable Screw

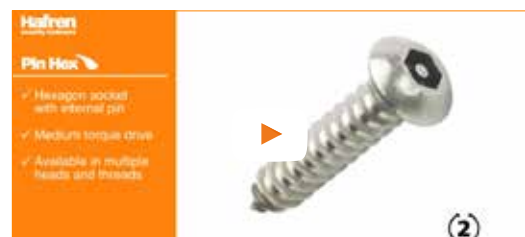

Every effort has been made to ensure the accuracy of information provided in this catalogue. Hafren Fasteners cannot warrant the information however, expressly or implied, and any liability arising from it is expressly excluded. Customers must satisfy themselves as to the suitability of products and the technical information relating to them, and it is recommended that you conduct your own tests to establish suitability. All sizes shown are in mm without min and max tolerances and are guide sizes. Hafren Fasteners reserve the right to change/alter sizes without notice. This does not effect your statutory rights.